



# FLEXIBLE MEDIA

## PRODUCT SHEET



### SOLVENT MEDIA

#### Laminated Frontlit Media

| Product ID        | Thickness (mm) | Roll Width (m) | Construction    | Weight (gr/sqm) |
|-------------------|----------------|----------------|-----------------|-----------------|
| QSFH340 M / G     | 0.30±0.02      | Note 1         | 200x300D, 18x12 | 340             |
| QSFH450 M / G     | 0.38±0.02      | Note 1         | 300x500D, 18x12 | 450             |
| QSFL450-9 M / G   | 0.38±0.02      | Note 1         | 500x500D, 9x9   | 450             |
| QSFM500 M / G +   | 0.40±0.02      | Note 1         | 300x500D, 18x12 | 500             |
| QSFH500-9 M / G + | 0.40±0.02      | Note 1         | 1000x1000D, 9x9 | 500             |
| QSFL500-9 M / G + | 0.40±0.02      | Note 1         | 500x500D, 9x9   | 500             |
| QSFH580 M / G +   | 0.46±0.02      | Note 1         | 500x500D, 18x12 | 580             |
| QSFL580 M / G +   | 0.46±0.02      | Note 1         | 300x500D, 18x12 | 580             |

#### Laminated Backlit Media

| Product ID      | Thickness (mm) | Roll Width (m) | Construction    | Weight - gr/sqm |
|-----------------|----------------|----------------|-----------------|-----------------|
| QSB500 M / G    | 0.40±0.02      | Note 1         | 300x500D, 18x12 | 500             |
| QSBH500 M / G + | 0.40±0.02      | Note 1         | 500x500D, 18x12 | 500             |
| QSBH610 M / G + | 0.48±0.02      | Note 1         | 500x500D, 18x12 | 610             |

#### Coated Frontlit Media

| Product ID         | Thickness (mm) | Roll Width (m) | Construction      | Weight - gr/sqm |
|--------------------|----------------|----------------|-------------------|-----------------|
| QSC450 M / G + *   | 0.40±0.02      | Note 1         | 1000x1000D, 18x18 | 450             |
| QSC510 M / G + * # | 0.42±0.02      | Note 1         | 1000x1000D, 18x18 | 510             |
| QSC900 M / G + *   | 0.70±0.02      | Note 1         | 1000x1000D, 30x30 | 900             |

#### Coated Backlit Media

| Product ID        | Thickness (mm) | Roll Width (m) | Construction      | Weight - gr/sqm |
|-------------------|----------------|----------------|-------------------|-----------------|
| QSCB510 M / G + * | 0.45+ 0.02     | Note 1         | 1000x1000D, 18x18 | 510             |

Note 1 Standard widths: 1.02, 1.22, 1.27, 1.37, 1.60, 1.80, 2.02, 2.20, 2.50, 2.80, 3.20

+ Optional 5 meter width

\* Optional B1 Fire Retardant

# Optional UL94-V0 Fire Retardant


General Standard outdoor durability is 1 year

Suffixes: M = Matt / G = Gloss

Standard roll length is 50 m

Hard Packing is standard

#### Processing Methods

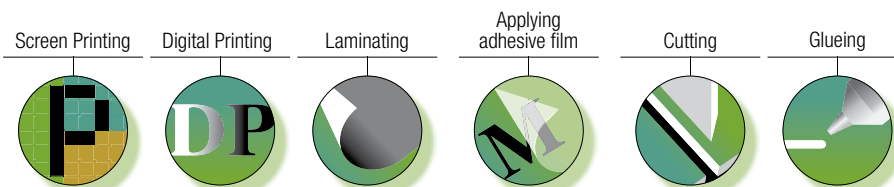



# FLEXIBLE MEDIA

## PRODUCT SHEET



### SOLVENT MEDIA

| Blockout    |                |                           |                 |                 |  |
|-------------|----------------|---------------------------|-----------------|-----------------|--|
| Product ID  | Thickness (mm) | Construction              | Standard Widths | Weight - gr/sqm | Comments   |
| QSOS440 *   | 0.34±0.02      | 300x300D, 42x40           | Note 1          | 440             | double sided matt only                           |
| QSOS510 *   | 0.36±0.02      | 300x300D, 42x40           | Note 1          | 510             | double sided matt only                           |
| QSOS780 *   | 0.55±0.02      | 1000x1000D, 18x18         | Note 1          | 780             | double sided matt only                           |
| PQSFO480-WG | 0.38±0.02      | 0.125mm PET + 2 layer PVC | Note 1          | 480             | frontlit - One side white matt / Other side grey |
| PQSFO480-WW | 0.38±0.02      | 0.125mm PET + 2 layer PVC | Note 1          | 480             | double sided white matt                          |

| Blockout         |                |                 |                 |                 |                                |
|------------------|----------------|-----------------|-----------------|-----------------|--------------------------------|
| Product ID       | Thickness (mm) | Construction    | Standard Widths | Weight - gr/sqm | Comments                       |
| QSFBL450 M/G     | 0.38±0.02      | 300x500D, 12x18 | Note 1          | 450             | one side black, one side white |
| QSFBL500-9 M/G + | 0.40±0.02      | 500x500D, 9x9   | Note 1          | 500             | one side black, one side white |
| QSFBL500-9 M/G + | 0.40±0.02      | 1000x1000D, 9x9 | Note 1          | 500             | one side black, one side white |

| Mesh       |                |                     |                   |                 |   |
|------------|----------------|---------------------|-------------------|-----------------|---|
| Product ID | Thickness (mm) | Construction        | Standard Widths   | Weight - gr/sqm | Comments                                    |
| QSM270 + * | 0.38±0.02      | 12x12 , 1000Dx1000D | Note 1, Option B1 | 270             | Options: 5m width, B1                       |
| QSM1270    | 0.43±0.02      | 12x12 , 1000Dx1000D | Note 1            | 350             | liner option can be ordered up to 3.2m only |

Note 1 Standard widths: 1.02, 1.22, 1.27, 1.37, 1.60, 1.80, 2.02, 2.20, 2.50, 2.80, 3.20

+ Optional 5 meter width

\* Optional B1 Fire Retardant

# Optional UL94-V0 Fire Retardant

General Standard outdoor durability is 1 year

Suffixes: M = Matt / G = Gloss

Standard roll length is 50 m

Hard Packing is standard

#### Processing Methods

